Aero jacket Instruction Manual for Front Fender

Item No.：**０９－０９－００４６**

Applicable models and frame Nos:

Ape50 Type D : AC18-1000001～

Ape100 Type D : HC13-1000001～

・Thank you for purchasing one of our TAKEGAWA's products. You are requested to follow the below-mentioned instructions in installing this Kit.
・Before installation, please check the contents of this Kit. Should you have any questions about the product, please kindly contact your local dealer.

◎ **Please note that the descriptions in this manual like illustrations and photos may differ from the actual hardware.**

Please read the following instructions before installation.

◎ We do not take any responsibility for any accident or damage whatsoever arising from the use of the products not in conformity with the instructions in the manual.
◎ We shall be held free from any kind of warranty whatsoever of products other than this product if the glitch takes place on the other products than this one after the installation and use of this product.
◎ You are kindly requested not to contact us about the combination of our products with other manufacturers'.
◎ This product is designed for exclusive use in the above-mentioned types of motorcycles and frame numbers only. Please take note that this product cannot be mounted on other types of motorcycles.
◎ NEVER apply gasoline or thinner to the fenders when performing maintenance of them. Otherwise, the applied portion may deform or discolor.
◎ The white and black gel coating of the FRP products is treated in the preceding processes, not in the final process. As a matter of principle, we paint all The FRP products.
As a result, when finishing treatment is given to the surface after treating the mottled portions or giving gel coating treatment, it sometimes happens that the gel coat layers are peeled off, exposing the plastic surface partly, which please note.

⚠ CAUTION The following show the envisioned possibility of injuries to human bodies or property damage as a result of disregarding the following cautions.

・Work only when the engine and the muffler are cool.
(Otherwise, you will burn yourself.)
・Prepare right tools for the work, and do the work in the proper and right way.
(Otherwise, improper work could cause breakage of parts or injuries to yourself.)
・As some products and frames have sharp-pointed or protruding portions, please work with your hands protected.
(Otherwise, you will suffer injuries.)
・Before riding, always check every section for slack in parts like screws. If you find slack ones, screw them securely up to the specified torque.
(Or improper torque may cause parts to come off.)

⚠ WATNING The following show the envisioned possibility of human death or serious injuries to human bodies as a result of disregarding the following cautions.

・When you notice something abnormal with your motorcycle while riding down a road, stop riding immediately and park your motorcyle in a safe place. (Otherwise, the abnormaility could lead to an accident.)
・Before doing work, place the motorcycle on level ground to stablize the position of your motorcycle for safety's sake.
(Otherwise, your motorcycle could fall down and injure you while you are working.)
・Check or perform maintenance of parts correctly according to the procedures in the instruction manual or a service manual.
(Improper checking or maintence could lead to an accident.)
・If you find damaged parts when checking and performing maintenance, do not use these parts any longer, and replace them with new ones.
(The continued use of these damaged parts as they are could lead to an accident.)

◎ Please be informed that, mainly because of improvement in performance, design changes, and cost increase, the product specifications and prices are subject to change without prior notice.
◎ This manual should be retained for future reference.

Dec./16/ 09

～Kit Contents～

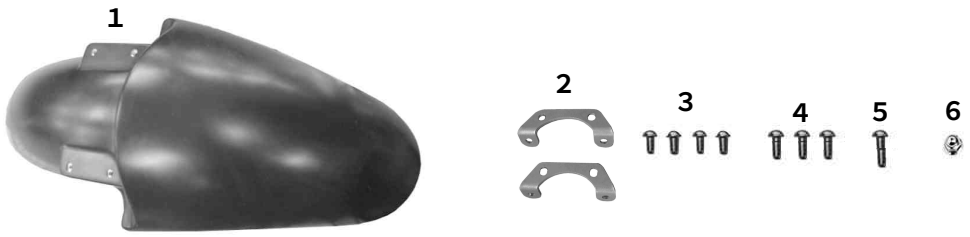

No.	Parts Name	Qty	Repair Part Item No.	in packs of
1	Front fender	1	————————	
2	Front fender stay	2	45156-GEF-T00	1
3	Flange button head socket screw, 6X16	4	00-00-0235	2
4	Button head socket screw, 6X15	3	00-00-0132	4
5	Button head socket screw, 6X25	1	00-00-0126	5
6	Flange cap nut, 6mm	1	00-00-0294	10

※Please note that in ordering repair parts, be sure to quote the Repair Part Item No. Otherwise, we may not be able to accept your orders. There are some parts, however, for which we are not in a position to accept your order in just the quantity to be used. In this case, please take them in the quantity packed.

～Installation Procedures～

1. Unfasten three bolts holding a stock fender, and then remove the stock front fender.

2. Fitting a front cable-guide stay between a left-side front fork and a front fender stay, hold them with 6x15 button head socket screws.
Torque: 10 N•m (1.0 kgf•m)



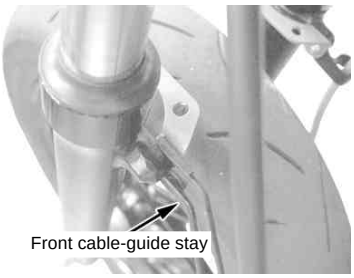

3. As shown in the picture below, install the stay and button head socket screws onto the right-side front fork.
Install the front-brake clamper B at a portion as shown in the picture below, and hold it with a 6mm flange cap nut.
Torque: 10 N•m (1.0 kgf•m)



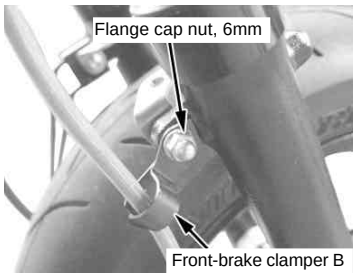

4. Placing the front fender on the tire, install the fender onto the stay using 6x16 flange button head socket cap screws.
Torque: 8 N•m (0.8 kgf•m)

SPECIAL PARTS TAKEGAWA Co.,Ltd.
3-5-16 Nishikiorihigashi Tondabayashi
Osaka Japan
TEL : 81-721-25-1357 FAX : 81-721-24-5059
URL : http://www.takegawa.co.jp